




MS00 type 60mm mortar sight

The 60mm mortar sight is designed for observing, aiming, and firing 60mm mortars. It can accurately adjust the position of the target based on different types of ammunition and target distances. This product supports both direct and indirect aiming at targets and features precise and reliable installation, as well as quick and easy disassembly.

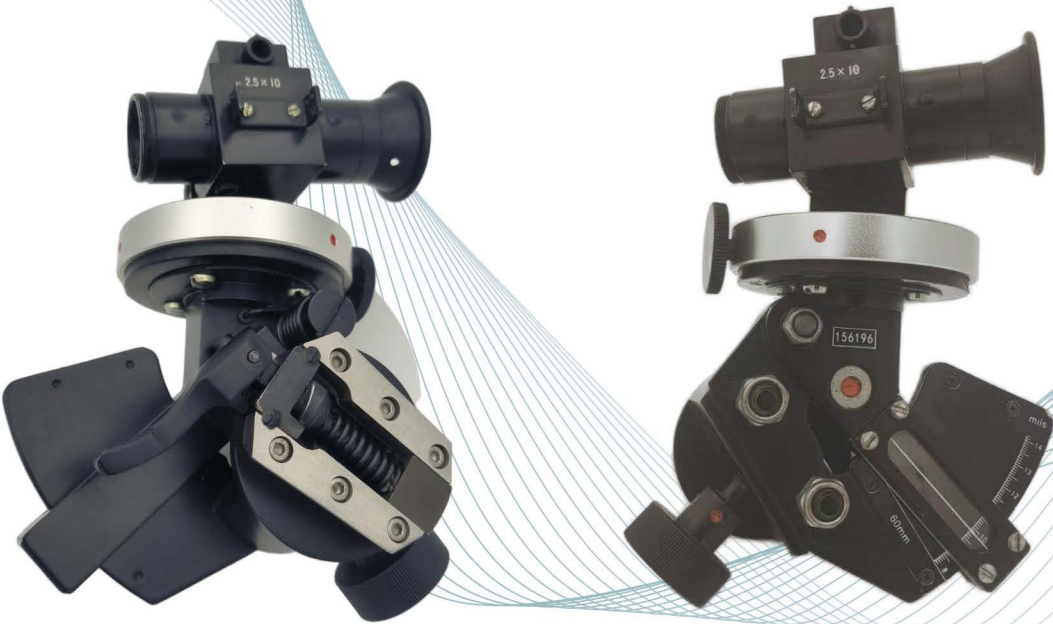

Magnification	2.5 ×	Field of view	9°
Directional angular accuracy is	5 mil	High Angle of elevation accuracy	10 mil
The range of angular measurement	is high and low from 8:00 to 14:00 Direction 0-00 to 64-00		



60mm mortar sight

The sight is suitable for the 60mm mortar series products, which obtains the target position information through indirect aiming. According to the target position information, the operator can adjust the pitch and azimuth mechanism to achieve rapid and accurate aiming of the target.



main performance and technical parameters

magnification	2×
field of view	11°
exit pupil diameter	20mm
distance of exit pupil	45° ~ 85°
Direction correction range	± 200mil
Direction correction accuracy	≤ 3 mil
Range of high and low metering	45° ~ 85°
High and low metering accuracy	≤ 2mil
weight	≤ 450g
Interface form	Picatinny